

# FULLY AUTOMATIC ELECTRONIC HIGH SPEED DOUBLE LAYER CUTTING AND SEALING MACHINE FOR T-SHIRT BAGS



ISO-9001

CE

MODEL: CWA2+P



CHAO WEI PLASTIC MACHINERY CO., LTD.



## MODEL: CWA2+6+P


# Fully Automatic Electronic High-Speed Double Layer (6 Lines) Cutting & Sealing Machine for T-Shirt Bags

### FEATURES:

- Automatic electronic control. Use plugging type IC easy replacing.
- Electromagnetic clutch and brake keep bags cutting and sealing accurately.
- The machine will stop automatically.  
When 1.The bags become super-imposed or overlapped.  
2.Film finished.  
3.The temperature not reaching setting.  
4.Air pressure not enough.
- This machine use penumatic punching machine, low power consumption, low noise level, no hot air pollution, smooth & perfect punching.

### OPTIONAL EQUIPMENT:

1. Servo Motor Control
2. Folding Device  
(minimum length 360 mm)
3. Calendar Type Bag Equipment

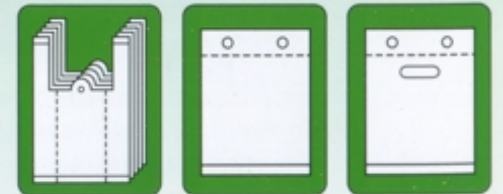



**MODEL: CWA2+8+P**


## Fully Automatic Electronic High-Speed Double Layer (8 Lines) Cutting & Sealing Machine for T-Shirt Bags

### FEATURES:

- Automatic electronic control. Use plugging type IC easy replacing.
- Electromagnetic clutch and brake keep bags cutting and sealing accurately.
- The machine will stop automatically.  
When 1.The bags become super-imposed or overlapped.  
2.Film finished.  
3.The temperature not reaching setting.  
4.Air pressure not enough.
- This machine use pumatic punching machine, low power consumption, low noise level, no hot air pollution, smooth & perfect punching.

### OPTIONAL EQUIPMENT:

1. Servo Motor Control
2. Folding Device  
(minimum length 360 mm)
3. Calendar Type Bag Equipment

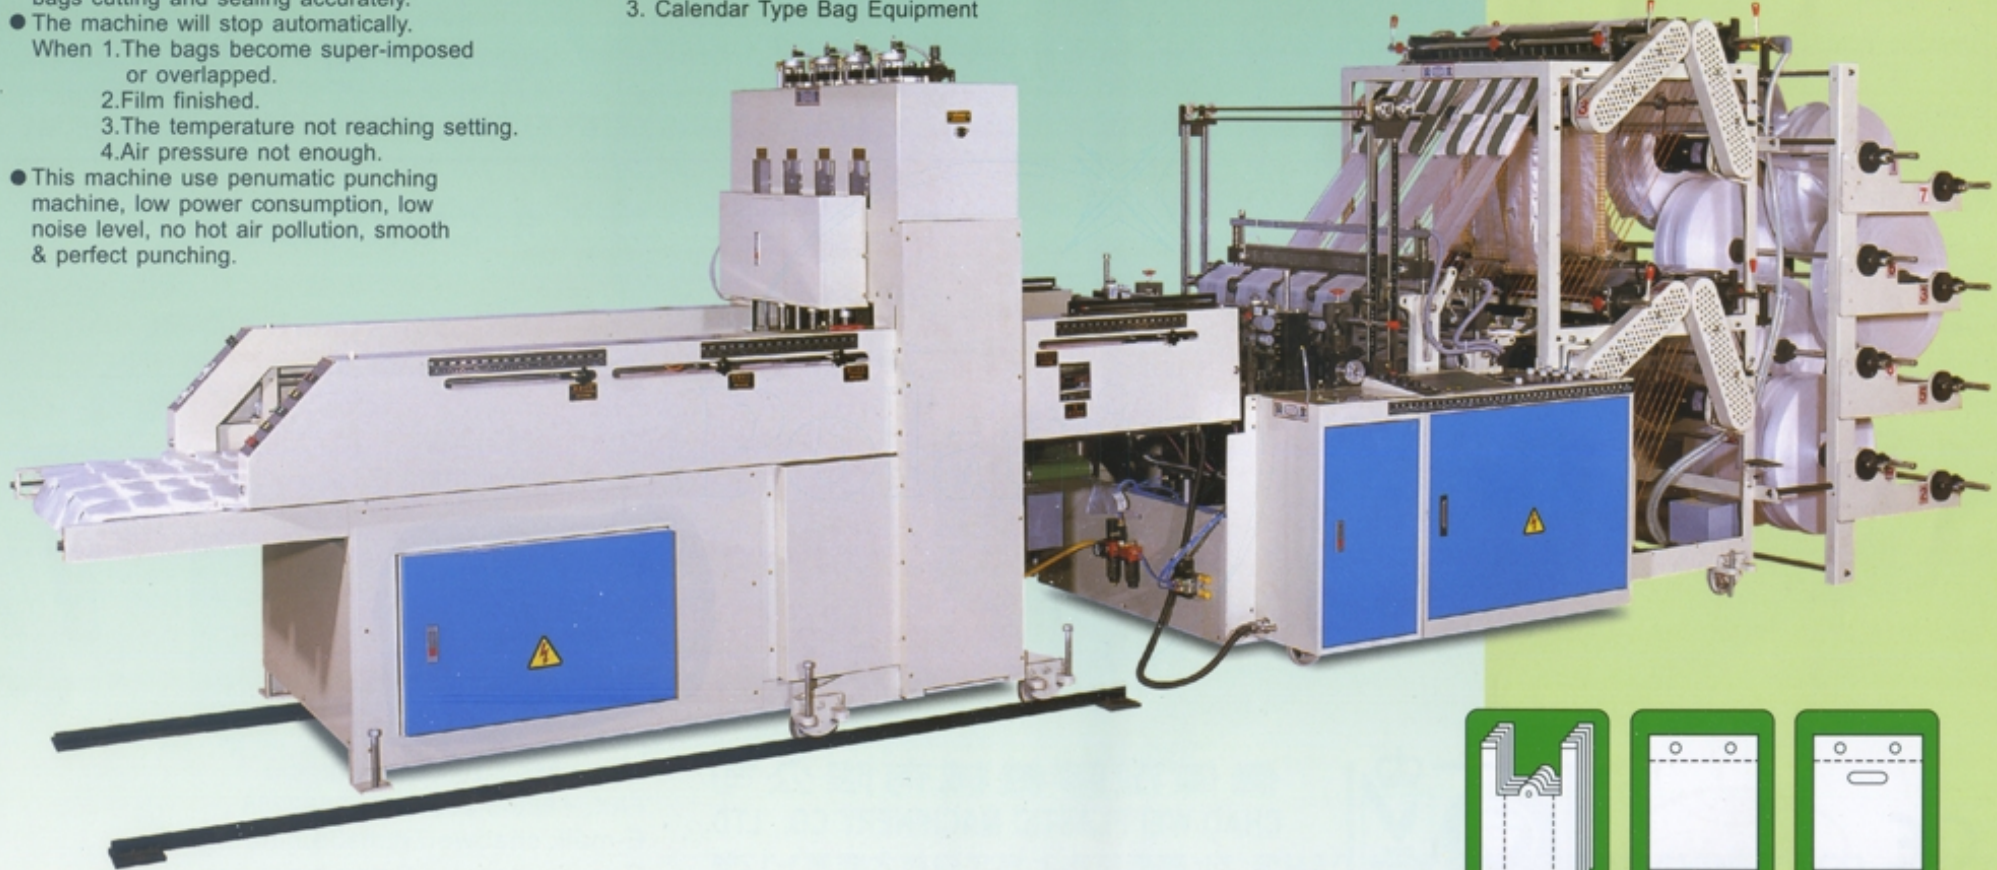



**SPECIFICATION: 規格**

型 式 MODEL	切袋寬 BAG WIDTH (MAX.)	封袋長 BAG LENGTH	封切厚度 CONVERTING THICKNESS	長度誤差 ACCURACY LENGTH	生產速度 SPEED P.C.S. /MIN	動 力 MOTOR (HP)	電 熱 HEATER	全台備電 POWER REQUIRED	機械尺寸 DIMENSION L×W×H (CM)	機械重量 MACHINE WEIGHT	裝箱尺寸 PACKING L×W×H (CM)	裝箱重量 GROSS WEIGHT
CWA2+P-700 28"	12"×4 300 mm×4	250~700 mm	0.008~0.04 m/m	±1 mm	30 ~ 120 ×4	2	3.6 kw	7.8 kw	590×145×155	2300 kgs	246×165×170 258×145×180	2700 kgs
CWA2+P-800 32"	14"×4 355 mm×4	250~700 mm	0.008~0.04 m/m	±1 mm	30 ~ 120 ×4	2	3.8 kw	8.0 kw	590×155×155	2400 kgs	280×187×175 300×157×185	2800 kgs
CWA2+P1000 40"	18"×4 450 mm×4	250~700 mm	0.008~0.04 m/m	±1 mm	30 ~ 120 ×4	2	4.2 kw	8.5 kw	590×175×155	2500 kgs	280×197×175 300×175×185	3000 kgs
CWA2+6+P-800 32"	9"×6 230 mm×6	250~700 mm	0.008~0.04 m/m	±1 mm	30 ~ 120 ×6	2	4.2 kw	8.7 kw	630×155×155	2700 kgs	280×187×175 300×157×185	3100 kgs
CWA2+6+P-1000 40"	12"×6 300 mm×6	250~700 mm	0.008~0.04 m/m	±1 mm	30 ~ 120 ×6	2	4.6 kw	9.2 kw	630×175×155	2800 kgs	280×197×175 300×175×185	3200 kgs
CWA2+8+P-800 32"	7"×8 180 mm×8	250~700 mm	0.008~0.04 m/m	±1 mm	30 ~ 120 ×8	2	4.6 kw	9.5 kw	630×155×165	2800 kgs	280×187×175 300×157×185	3200 kgs
CWA2+8+P-1000 40"	8½"×8 220 mm×8	250~700 mm	0.008~0.04 m/m	±1 mm	30 ~ 120 ×8	2	5.0 kw	11.2 kw	630×175×165	3000 kgs	280×197×175 300×175×185	3400 kgs

● Specifications are subject to change without notice for improvement.



**僑偉塑膠機械有限公司**  
**CHAO WEI PLASTIC MACHINERY CO., LTD.**

公 司: 嘉義縣水上鄉大堀村大堀尾1-12號  
NO. 1-12, TA CHUEH WEI, TA CHUEH TSUN, SUEI  
SANG HSIANG, CHIA YI HSIEN, TAIWAN, R.O.C.

TEL: + 886-5-2686688 . 2686677  
FAX: + 886-5-2687821 . 2682288  
E-mail: chaowei7@ms38.hinet.net  
E-mail: chao.wei@msa.hinet.net  
<http://www.chaowei.com.tw>

**Free Machinery CD-Roms are available upon request**